

QuickyTach®

IMPROVE YOUR
NEEDLE ATTACHING

Easy Pull
QuickyTest

QUICK & EFFICIENT
CONTROL

Attaching dies

Spare parts

© SUTUREX & RENODEX
2023

For any information on our
equipments

Contact us:

Tel.: + 33 (0)5 53 31 34 34

Fax: +33 (0)5 53 31 34 41

customer.service@suturex-renodex.com


www.suturex-renodex.com



SUTUREX & RENODEX
SURGICAL NEEDLES



INNOVATIVE EQUIPMENTS

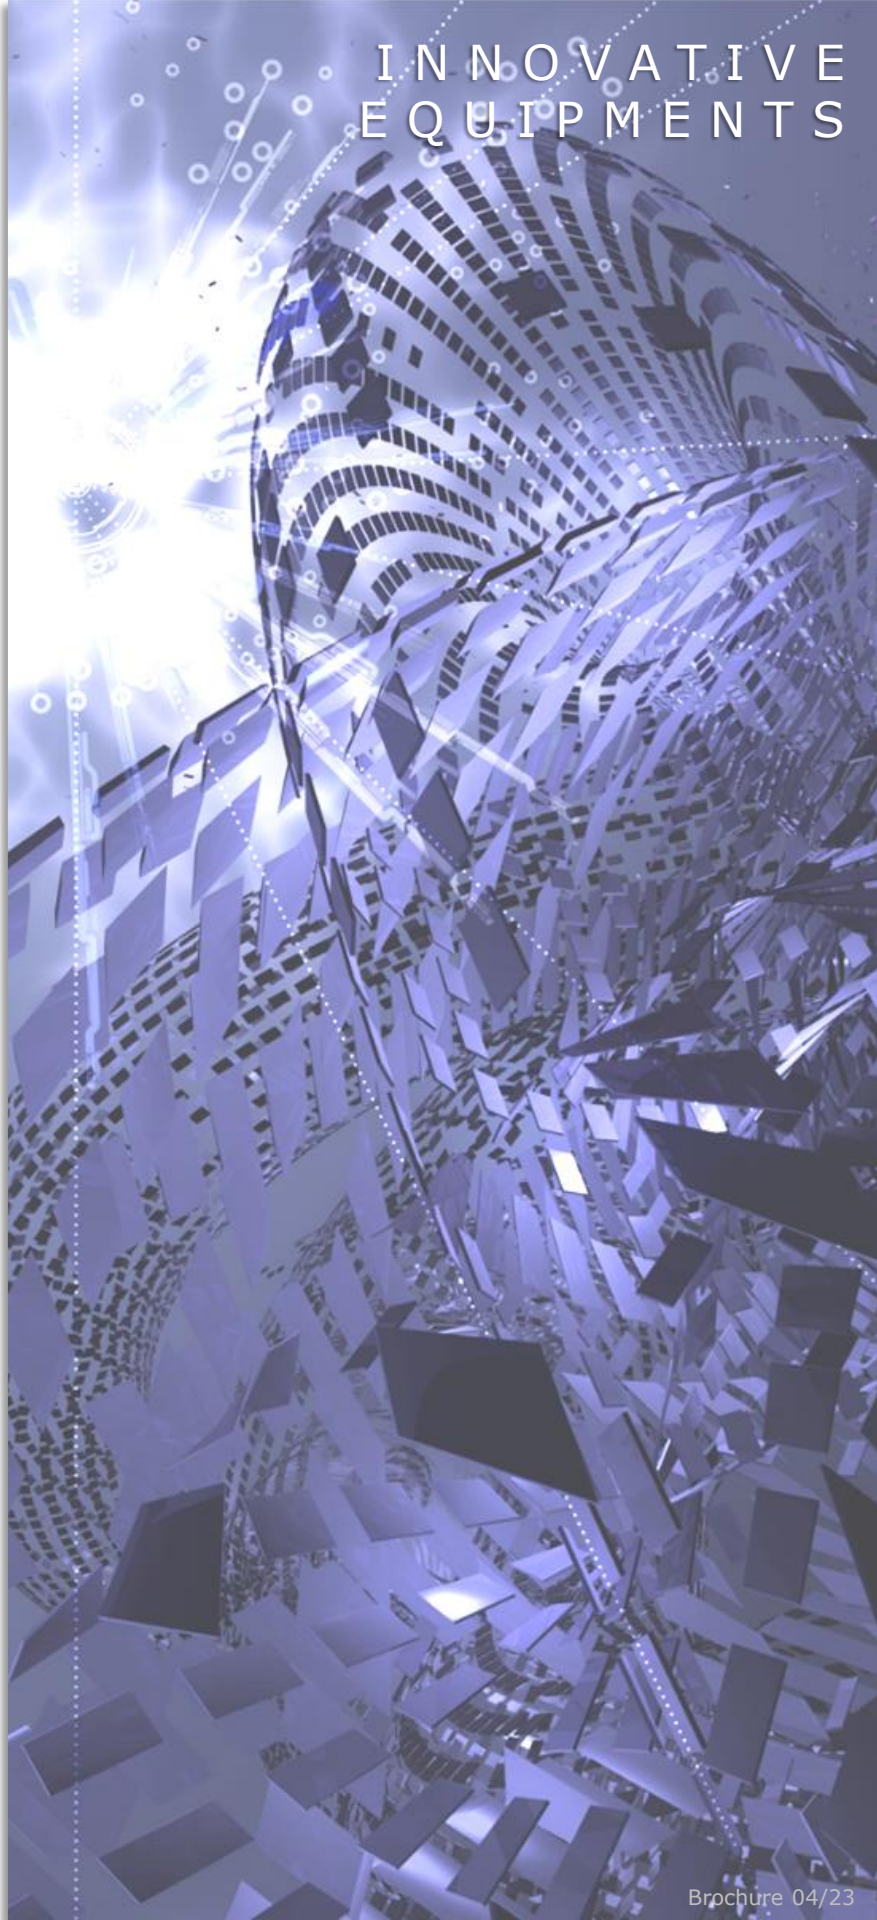

QUICKYTACH®

QUICK & EFFICIENT ATTACHING MACHINE FOR SURGICAL SUTURES

QuickyTach® pneumatical attaching machine is the answer to the market demand for faster and more economical machines, whilst maintaining a high flexibility and quality.

Advantages

Single Minute Exchange Die (SMED)
the first rapid die change attaching machine

- Pre-setting can be done away from the work station with removable die holder
The QuickyTach® is delivered with one die holder
- The die holder installation is quick and a micrometer screw guarantees easy locatable and precise attaching adjustment
- This system is compatible with your present range of dies
- The machine can be adapted to each operator by a simple adjustment of hand-rests.
- QuickyTach® is available only in pneumatic version
- Patented machine
- CE Certified
- A complete range of dies is offered for drilled end needles
- Our team of experts is also at your service to inform you and to answer your specific requests



Well established and well accepted on the market, QuickyTach® machine is constantly optimized and improved for more ergonomics and more efficiency. QuickyTach® machine is CE Marked and 1 year guaranteed. Designed and Made by Suturex & Renodex

QUICKYTACH® QUICK & EFFICIENT ATTACHING MACHINE FOR SURGICAL SUTURES

QuickyTach® pneumatical attaching machine is the answer to the market demand for faster and more economical machines, whilst maintaining a high flexibility and quality.

Technical specifications

❶ After training, depending on type of suture material

❷ Other needle shapes, needle lengths, thread materials, thread diameters, thread lengths and coatings might be used as well upon request



| | |
|--------------------------------------|--|
| Typical throughput | 400 products/hour ❶ |
| Instant cycle time | 2 seconds ❶ |
| Autonomy | Unlimited |
| Product changeover time | Less than 30 sec. |
| Sutures | Absorbable, non-absorbable |
| Needles | 10 to 90 mm, Straight, Curved (5/8, ½, 3/8 C, Ski, Hook) ❷ |
| Needle design | All drilled-end needle types |
| Threads | Monofilament & multifilament ❷ |
| Thread diameter | USP 6/0 to USP 7 ❷ |
| Machine dimensions | 320 x 290 x 220 mm (LxWxH) |
| Machine weight | ~6 kg |
| Control voltage / Power requirements | 24 VDC / 100-270 VAC / 50-60 Hz |
| Air pressure requirements | 6 bar / Class 5 |
| Noise level | < 75 dBA |
| Conformity | CE Conformity |

Options

— Camera, Light and screen

— A complete range of dies is offered for all types of needles

— Additional die holder



Well established and well accepted on the market, QuickyTach® machine is constantly optimized and improved for more ergonomics and more efficiency. QuickyTach® machine is CE Marked and 1 year guaranteed. Designed and Made by Suturex & Renodex

We are at your disposal to evaluate any special request (dies, tools, spare parts). We also offer technical assistance and attaching expertise. Feel free to contact us.

EASY PULL & QUICKYTEST

QUICK & EFFICIENT CONTROL EQUIPMENTS FOR PULL TESTS

EASY PULL Standard features

Spring dynamometer precise and compact


- Available in 4 versions: 6N (or 600 gf) and 25 N (or 2500 gf)
- Destructive and non-destructive tests
- Anodized aluminum tube with long-scale high-resolution, resistant to abrasion
- Tare and adjusting the zero position
- Measures forces break up to 10N for 25N version (ring driven)
- Operates without batteries



QUICKYTEST Standard features

Thanks to its adjustable head and its destructive and non-destructive control programs, it is suitable for all types of sutures.

- Electro luminescent display is highly visible in dark locations
- Multi-language program menus: English, Spanish, French, Chinese, German, Italian, Korean, Japanese
- Processes and transmits 2,000 data/sec.
- Color-coded LED indicators and output signal for Go/No Go testing
- Ergonomic design with non-slip grips, heavy duty metal construction
- Capacity up to 1,100 lbs (push/pull)
- Overload capacity 200% F.S.
- USB (virtual COM port), RS-232C, Digimatic and Analog outputs
- 1,000 data memory for recall or download
- External switch display hold and clear
- Internal Ni-MH batteries or AC adapter
- Real time and peak mode (selectable)
- Overload alarm and output signal
- Kit includes: ZT Logger data acquisition software, USB cable, AC adapter/charger, calibration cert traceable to NIST and carrying case.

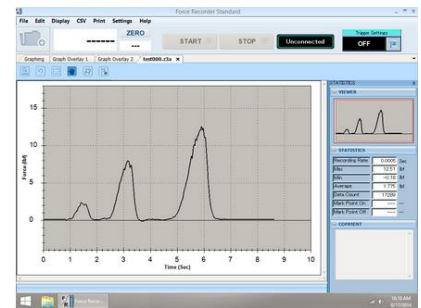

AUTO-CONTROL AT THE WORK STATION

QuickyTest and EasyPull are attaching control equipments: mobile, easy to use and dedicated to production
| The equipments are CE Marked and 1 year guaranteed | Delivered with calibration certificate.

HEADQUARTERS :

ZAE du Périgord Noir – 4, rue Jacques Chemel – 24 200 CARSAC-AILLAC – FRANCE
Tel.: + 33 (0)5 53 31 34 34 – Fax: +33 (0)5 53 31 34 41

CUSTOMER SERVICE :

customer.service@suturex-renodex.com

www.suturex-renodex.com

